

EU605

LED Bulb



The EU605 LED bulb is a transceiver which belongs to the member of U-Net series and is fully compatible with any U-Net enabled devices.

The unit is designed to be turned on/off by software or local switch. It can be installed anywhere and doesn't need additional components to communicate wireless with the control device.

Main Features

- 6W consumption
- Wireless two-way communication
- Auto-pairing to the gateway
- Base: E26/E27
- Mounting height (recommended): 2.5m
- Reports status to the gateway every hour




EVERSPRING®

Smarter, Safer, Greener

Brief Product Specifications

Frequency range	868.30 MHz
RF range (open space)	>30m
RF protocol	U-Net 3.0
Connector	1 x Lamp holder
Plug type	E26/E27
Max load	6W
Lumens	350 lm

Color temperature	5000K
Power input	E27: AC220V-240V, 50Hz E26: AC90V-120V, 50Hz/60Hz
Operation temperature	0 - 40°C
Operating humidity	85% RH max
Dimension (mm)	115.6(W) x 51.3(H)
Weight	132g

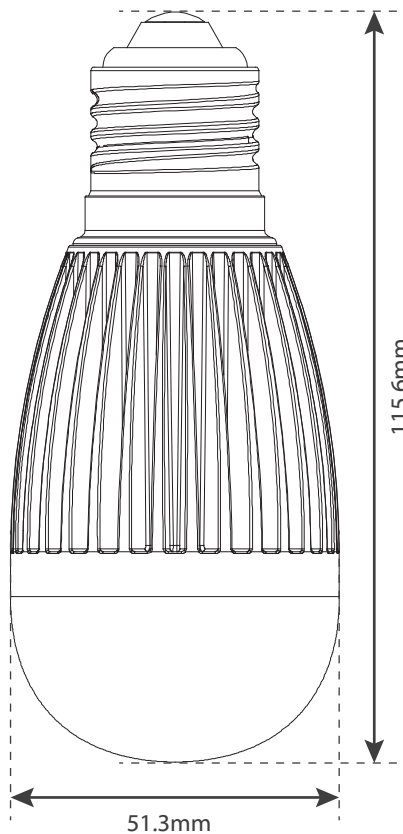

EVERSPRING®
Everspring Industry Co., Ltd.

Copyright © 2017 by Everspring Industry Co., Ltd. All rights reserved. The Everspring name and logo are registered trademarks of Everspring Industry Co., Ltd. All other trademarks and brand names are the property of their respective owners. Everspring reserves the right to revise product specifications and literature at any time without prior notice to any party.

Confidentiality Statement

The purpose of this document is to provide general information about a product or products of Everspring Industry Co., Ltd. All information contained in this document is the confidential property of Everspring Industry Co., Ltd. Except where expressly authorized by Everspring Industry Co., Ltd., alteration, reproduction, redistribution, or transmission of this document by any means is strictly prohibited.

3F, No.50, Sec.1, Zhonghua Rd., Tucheng Dist.,
New Taipei City 23666, Taiwan

Tel: +886-2-2260-6868
Fax: +886-2-2260-1313

Web: www.everspring.com
E-mail: sales@everspring.com